


AS 1100AS EG, SS, ZTC

RIGID CONDUIT CLAMP

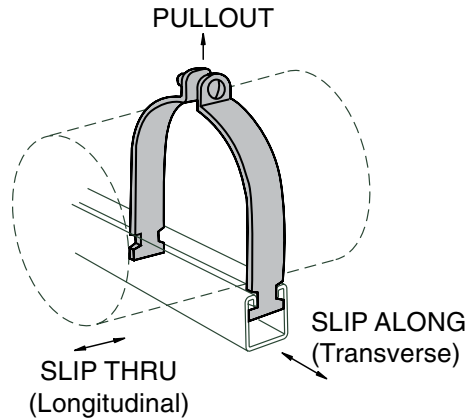

| Pipe Size | O.D. Size | Steel Ga. | Wt./100 Pcs. | Std. Pkg. |
|-----------|-----------|-----------|--------------|-----------|
| 1/4" | 0.540 | 16 | 11 | 100 |
| 3/8" | 0.675 | 16 | 12 | 100 |
| 1/2" | 0.840 | 16 | 13 | 100 |
| 3/4" | 1.050 | 16-14 | 15 | 100 |
| 1" | 1.315 | 14 | 18 | 100 |
| 1 1/4" | 1.660 | 14 | 22 | 100 |
| 1 1/2" | 1.900 | 14-12 | 32 | 50 |
| 2" | 2.375 | 12 | 37 | 50 |
| 2 1/2" | 2.875 | 12 | 42 | 50 |
| 3" | 3.500 | 12 | 49 | 50 |
| 3 1/2" | 4.000 | 11 | 65 | 25 |
| 4" | 4.500 | 11 | 69 | 25 |
| 5" | 5.563 | 11 | 82 | 25 |
| 6" | 6.625 | 11-10 | 107 | 25 |
| 8" | 8.625 | 11-10 | 133 | 25 |
| 10" | 10.750 | 11-10 | 143 | 10 |
| 12" | 12.750 | 11 | 170 | 10 |

| Nominal Pipe Size | Design Loads * | | |
|-------------------|----------------|------------------|-----------------|
| | Pullout (lbs) | Slip Along (lbs) | Slip Thru (lbs) |
| 1/4" | 650 | 90 | 100 |
| 3/8" | 650 | 100 | 100 |
| 1/2" | 650 | 100 | 100 |
| 3/4" | 650 | 100 | 100 |
| 1" | 650 | 100 | 100 |
| 1 1/4" | 950 | 200 | 200 |
| 1 1/2" | 1050 | 300 | 300 |
| 2" | 1350 | 300 | 300 |
| 2 1/2" | 1300 | 250 | 300 |
| 3" | 1150 | 300 | 300 |
| 3 1/2" | 1150 | 300 | 300 |
| 4" | 1550 | 300 | 300 |
| 5" | 1550 | 300 | 300 |
| 6" | 1550 | 300 | 250 |
| 8" | 1450 | 300 | 300 |
| 10" | 1550 | - | - |
| 12" | 1400 | - | - |

All sizes are offered in pre-assembled only
 ORDERING: Specify figure number and pipe size.

* Safety Factor 3.0

Std Pkg & Wt/100 pcs: See chart above.

LEGEND:

GR: Powder Coated Supr-Green EG: Electro-Galvanized PG: Pre-Galvanized AL: Aluminum HG: Hot Dipped Galvanized PL: Plain SS: Stainless Steel ZTC: Zinc Trivalent Chromium
 Stainless Steel (SS), Zinc Trivalent Chromium (ZTC) and Hot Dipped Galvanized (HG) are specialty finishes. Pricing is located in the Specialty Strut Section of the Anvil-Strut price book.

| PROJECT INFORMATION | | APPROVAL STAMP | |
|---------------------|--|--|--|
| Project: | | <input type="checkbox"/> Approved | |
| Address: | | <input type="checkbox"/> Approved as noted | |
| Contractor: | | <input type="checkbox"/> Not approved | |
| Engineer: | | Remarks: | |
| Submittal Date: | | | |
| Notes 1: | | | |
| Notes 2: | | | |