

## Fig. 134

## Heavy Duty Beam Clamp

**Size Range:** 4" through 12"

**Material:** Carbon steel

**Finish:**  Plain or  Hot-Dip Galvanized with Zinc Plated Fasteners

**Service:** Clamp centers the load on beam to prevent distortion

**Approvals:** Complies with Federal Specification A-A-1192A (Type 21) WW-H-171-E (Type 21), ANSI/MSS SP-69 and MSS SP-58 (Type 21).



Fig. 134 UL Listed and FM Approved when used with 1/2" and 5/8" rod.

**Components:** Two half-clamps, pipe spacer and bolt with nut assembled.

**Ordering:** Figure number, width of flange, name and finish.

**Note:** Spacer is furnished for use with Fig. 290 weldless eye nuts.

Spacer may be removed for use with Fig 278 eye rods.

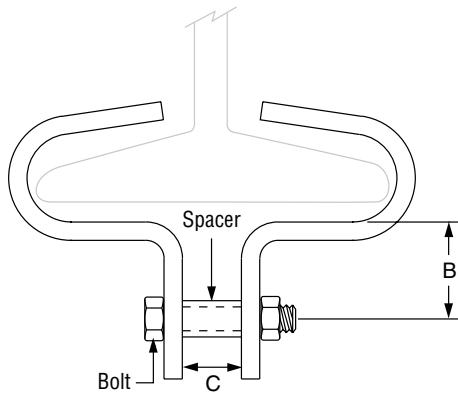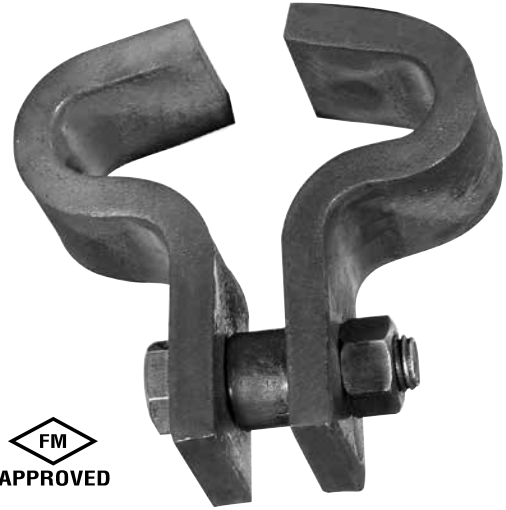

**FIG. 134: LOADS (LBS) • DIMENSIONS (IN)**

	C	B	Bolt Size	Spacer O.D.	Max Load
<b>Fig. 134</b>	3/4	2 1/4	5/8	1 1/16	3,000

Flange Size		
Flange Width	Max Flange Thickness	Weight (lbs)
		Fig. 134 Heavy Duty
4	1/2	3.82
5	5/8	4.35
6	3/4	4.52
7	7/8	4.84
8		5.10
9	1	5.83
10		6.25
11		6.67
12		7.09

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Date:			
Notes 1:			
Notes 2:			