

Fig. 134

Heavy Duty Beam Clamp

Size Range: 4" through 12"

Material: Carbon steel

Finish: Plain or Hot-Dip Galvanized with Zinc Plated Fasteners

Service: Clamp centers the load on beam to prevent distortion

Approvals: Complies with Federal Specification A-A-1192A (Type 21) WW-H-171-E (Type 21), ANSI/MSS SP-69 and MSS SP-58 (Type 21).

Fig. 134 UL Listed and FM Approved when used with 1/2" and 5/8" rod.

Components: Two half-clamps, pipe spacer and bolt with nut assembled.

Ordering: Figure number, width of flange, name and finish.

Note: Spacer is furnished for use with Fig. 290 weldless eye nuts.

Spacer may be removed for use with Fig 278 eye rods.

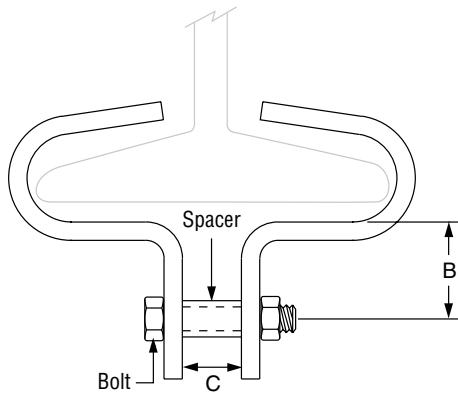
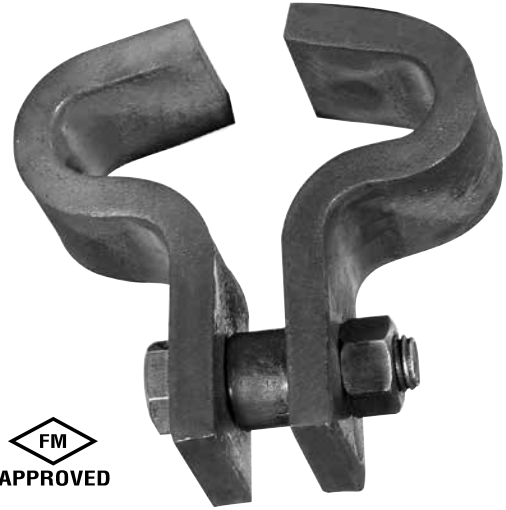


FIG. 134: DIMENSIONS (IN) • LOADS (LBS)

	C	B	Bolt Size	Spacer O.D.	Max Load
Fig. 134	3/4	2 1/4	5/8	1 1/16	3,000

Flange Size		
Flange Width	Max Flange Thickness	Weight (lbs)
		Fig. 134 Heavy Duty
4	1/2	3.82
5	5/8	4.35
6	3/4	4.52
7	7/8	4.84
8		5.10
9	1	5.83
10		6.25
11		6.67
12		7.09

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Date:			
Notes 1:			
Notes 2:			