

General Purpose Taper Shank Drill Metric

Styles

R10, R15, R18

R10P, R15P, R18P

	HSS	HSS	HSS
	DIN 345	DIN 345	DIN 341
	4XD	4XD	6XD
	118°	118°	118°
	ST	TIN	ST
	N	N	N
	5ATS	A530	A350
	5.00 - 50.00	8.50 - 40.00	5.00 - 50.00
	163	163	163
1.1	115I	154I	89I
1.2	98I	131I	82I
1.3	82F	98F	66G
1.4	66F	89F	52F
1.5	39E	66E	33E
1.6	30D	33D	20D
1.7			
1.8			
2.1	49E	79E	43E
2.2	30G	43G	13G
2.3	33C	66C	26C
2.4			
3.1	98I	118I	85I
3.2	79E	92E	66F
3.3	66E	89E	59E
3.4	46E	72E	36E
4.1	75F	105F	52F
4.2	43D	59D	30D
4.3	23B	43B	16B
5.1	33G	43G	26G
5.2	23E	20E	13E
5.3	13A	10A	10A
6.1	108F	197G	108F
6.2	115I	180I	115I
6.3	115H	131G	115H
6.4	52F	115E	52F
7.1	85J	180I	108J
7.2	98I	148I	82I
7.3	92H	115G	89H
7.4	75H	92G	82H
8.1	98K	164J	115L
8.2	92J	164H	85J
8.3	46H	115F	39H
9.1	10B	10B	10B
10.1			

How To Use This Chart:

1. Determine your Workpiece Material from the Application Material Groups (AMG) below.
2. Use the Icons to find Product Features.
3. Find the Surface Feet Per Minute (SFM) and Alpha Code
 example: 361W
 361 = SFM
 W = Alpha Code used to find your Feed Rate

Feed Rate Chart

Alpha Code	Feed in Inches per Revolution (IPR) ± 25%															Ø Diameter				
	1mm/ 1/32"	2mm/ 3/32"	3mm/ 1/8"	4mm/ 5/32"	5mm/ 3/16"	6mm/ 1/4"	8mm/ 5/16"	10mm/ 3/8"	12mm/ 1/2"	15mm/ 9/16"	16mm/ 5/8"	20mm/ 3/4"	25mm/ 1"	30mm/ 1.1/8"	40mm/ 1.5/8"	50mm/ 2"				
A	0.0004	0.0009	0.0011	0.0013	0.0014	0.0017	0.0021	0.0024	0.0027	0.0032	0.0034	0.0043	0.0049	0.0053	0.0061	0.0069				
B	0.0006	0.0011	0.0015	0.0016	0.0018	0.0021	0.0026	0.0031	0.0035	0.0041	0.0043	0.0053	0.0060	0.0065	0.0074	0.0082				
C	0.0006	0.0013	0.0017	0.0020	0.0022	0.0025	0.0031	0.0039	0.0043	0.0049	0.0051	0.0063	0.0071	0.0077	0.0087	0.0094				
D	0.0006	0.0015	0.0021	0.0024	0.0027	0.0031	0.0039	0.0047	0.0051	0.0059	0.0061	0.0074	0.0083	0.0090	0.0100	0.0108				
E	0.0007	0.0017	0.0024	0.0028	0.0031	0.0037	0.0045	0.0055	0.0059	0.0068	0.0071	0.0085	0.0094	0.0102	0.0112	0.0122				
F	0.0007	0.0020	0.0029	0.0033	0.0037	0.0043	0.0054	0.0065	0.0070	0.0080	0.0083	0.0098	0.0108	0.0116	0.0126	0.0135				
G	0.0007	0.0022	0.0033	0.0038	0.0043	0.0050	0.0063	0.0075	0.0081	0.0091	0.0094	0.0110	0.0122	0.0130	0.0140	0.0148				
H	0.0008	0.0026	0.0040	0.0046	0.0051	0.0059	0.0075	0.0090	0.0096	0.0107	0.0110	0.0126	0.0140	0.0148	0.0157	0.0165				
I	0.0008	0.0030	0.0047	0.0053	0.0059	0.0068	0.0087	0.0104	0.0110	0.0122	0.0126	0.0142	0.0157	0.0165	0.0173	0.0181				
J	0.0009	0.0033	0.0053	0.0060	0.0067	0.0078	0.0098	0.0117	0.0124	0.0137	0.0142	0.0159	0.0175	0.0183	0.0191	0.0198				
K	0.0010	0.0036	0.0059	0.0067	0.0075	0.0087	0.0110	0.0130	0.0138	0.0153	0.0157	0.0177	0.0193	0.0201	0.0209	0.0215				
L	0.0011	0.0040	0.0065	0.0073	0.0082	0.0094	0.0120	0.0142	0.0152	0.0165	0.0169	0.0191	0.0207	0.0215	0.0224	0.0231				
M	0.0012	0.0043	0.0071	0.0080	0.0089	0.0102	0.0130	0.0154	0.0165	0.0177	0.0181	0.0205	0.0220	0.0228	0.0238	0.0248				
N	0.0013	0.0047	0.0077	0.0086	0.0095	0.0110	0.0140	0.0165	0.0179	0.0189	0.0193	0.0219	0.0234	0.0242	0.0253	0.0265				
S	0.0003	0.0006	0.0008	0.0010	0.0012	0.0015	0.0020	0.0031	0.0039	0.0048	0.0051	0.0059	0.0070	0.0070	0.0090					
T	0.0006	0.0011	0.0016	0.0020	0.0024	0.0028	0.0035	0.0043	0.0051	0.0063	0.0067	0.0075	0.0080	0.0090	0.0100					
U	0.0010	0.0019	0.0028	0.0031	0.0035	0.0042	0.0055	0.0067	0.0079	0.0088	0.0091	0.0094	0.0110	0.0120	0.0140					
V	0.0015	0.0027	0.0039	0.0045	0.0051	0.0060	0.0079	0.0098	0.0110	0.0122	0.0126	0.0134	0.0160	0.0170	0.0200					
W	0.0019	0.0035	0.0051	0.0059	0.0067	0.0079	0.0102	0.0130	0.0150	0.0165	0.0169	0.0177	0.0190	0.0190	0.0200					
X	0.0022	0.0041	0.0059	0.0071	0.0083	0.0098	0.0130	0.0165	0.0189	0.0210	0.0217	0.0228								
Y	0.0027	0.0049	0.0071	0.0087	0.0102	0.0125	0.0169	0.0217	0.0276	0.0276	0.0276	0.0291								
Z	0.0037	0.0068	0.0098	0.0128	0.0157	0.0210	0.0315	0.0394	0.0433	0.0463	0.0472	0.0472								

How To Use This Chart to Find Cutting Feed Rate (IPR):

1. Find your Alpha Code on the AMG Chart (example: 279 U : U is the Alpha Code)
2. Find the closest diameter for your cutting application on the chart to find your IPR


Application Material Groups (AMG)		Hardness HRC	ISO
1. Steel	1.1 Magnetic soft steel	12L14, 12L15	<120 HB P 1
	1.2 Structural Steel/ case carburising steel	1005-1025, 1214, 1215, A36	<200 HB P 1
	1.3 Plain Carbon steel	1030-1060, 1050-1060, 1144-1146	<24 P 2
	1.4 Alloy steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	<24 P 3
	1.5 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>24<38 P 4
	1.6 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>38 H 1
	1.7 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	49-55 H 3
	1.8 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	55-63 H 4
2. Stainless Steel	2.1 Free machining Stainless Steel	200, 303, 416, 420F, 430F, 440	<24 M 1
	2.2 Austenitic	301, 302, 304, 316, 321, 330, CUSTOM 455, AM-350	<24 M 3
	2.3 Ferritic + Austenitic, Martensitic	318-329, 400-446, DUPLEX	<32 M 2
	2.4 Precipitation Hardened	15-5PH, Custom 450 17-4PH	<32 S 2
3. Cast Iron	3.1 Lamellar graphite	Grey, G10, Gg40, J431C, A48 CLASS 20	<150 HB K 1
	3.2 Lamellar graphite	Grey, GG25-Gg40, J158, A48 CLASS 40-60	>150 HB<32 K 2
	3.3 Nodular graphite/ Malleable Cast Iron	A220, A436, A439, A602, Black, GGG40-GGG70	<200 HB K 3
	3.4 Nodular graphite/ Malleable Cast Iron	Black Gts/Gtw, J434C	>200 HB<32 K 4
4. Titanium	4.1 Titanium, unalloyed	Commercially Pure	<200 HB S 1
	4.2 Titanium, alloyed	6Al4V, 6A14V-2Sn, Monel, Monel K	<28 S 2
	4.3 Titanium, alloyed	6Al4V-4Mo, 7A14V-4Mo, 4911-4967	>28<38 S 3
5. Nickel	5.1 Nickel, unalloyed	Commercially Pure, 17644, 200, 5553	<150 HB S 1
	5.2 Nickel, alloyed	Monel 400, Hastelloy C, Inconel 625, Waspaloy	<28 S 2
	5.3 Nickel, alloyed	Inconel 718, Nimonic 75-95, Rene 41, Inconel 825, A286	>28<38 S 3
6. Copper	6.1 Copper	Commercially Pure	<100 HB N 3
	6.2 β-Brass, Bronze	314-340, 350-370	<200 HB N 4
	6.3 α-Brass	Alloyed Cu + Al + Fe, Long Chipping	<200 HB N 3
	6.4 High Strength Bronze	Ampco 18-25	<49 N 4
7. Aluminium Magnesium	7.1 Al, Mg, unalloyed	Commercially Pure	<100 HB N 1
	7.2 Al alloyed, Si<0.5%	6061 T6, 7075, 314-340	<150 HB N 1
	7.3 Al alloyed, Si>0.5%<10%	6061 T6, 380-390	<120 HB N 1
	7.4 Al alloyed, Si>10% Mg alloys	Magnesium Whisker Reinforced	<120 HB N 2
8. Synthetic Materials	8.1 Thermoplastics	Ultradim, Polystrol	---
	8.2 Thermosetting plastics	Bakelit, Pertinax	---
	8.3 Reinforced plastic materials	CFK, GFKAFK	---
9. Hard Mat.	9.1 Cermets (Metal-ceramics)	Ferrotic	<54 H
10. Graphite	10.1 Standard graphite		---

General Purpose Taper Shank, Metric

5ATS Steam Oxide for increased wear resistance & lubricity.

A350 Long series. Steam Oxide for increased wear resistance & lubricity.

A530 TiN Coating increases wear resistance and improves tool life. Thinned Point design above 14mm diameter to reduce thrust and improve chip formation.

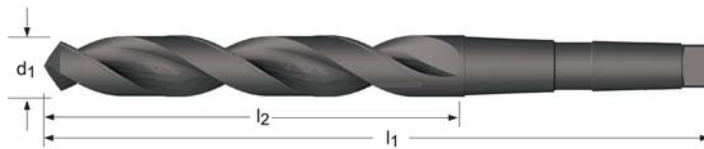

5ATS	A350	A530
5.00 - 50.00	5.00 - 50.00	8.50 - 40.00

d_1 $\varnothing h_8$ mm	d_1 decimal Inch	l_2 mm	l_1 mm	MTS	Pack Qty	5ATS	A350	A530
5.00	0.1969	74	155	1	1	—	0034071	—
5.00	0.1969	52	133	1	1	026050	—	—
5.50	0.2165	80	161	1	1	—	0034088	—
5.50	0.2165	57	138	1	1	026055	—	—
6.00	0.2362	80	161	1	1	—	0034118	—
6.00	0.2362	57	138	1	1	026060	—	—
6.50	0.2559	63	144	1	1	026065	—	—
6.70	0.2638	86	167	1	1	—	0034125	—
6.80	0.2677	93	174	1	1	—	0034149	—
6.80	0.2677	69	150	1	1	026068	—	—
7.00	0.2756	93	174	1	1	—	0034156	—
7.00	0.2756	69	150	1	1	026070	—	—
7.50	0.2953	93	174	1	1	—	0034163	—
7.50	0.2953	69	150	1	1	026075	—	—
8.00	0.3150	100	181	1	1	—	0034187	—
8.00	0.3150	75	156	1	1	026080	—	—
8.40	0.3307	100	181	1	1	—	0034200	—
8.50	0.3346	100	181	1	1	—	0034217	—
8.50	0.3346	75	156	1	1	026085	—	0041277
8.75	0.3445	107	188	1	1	—	0034224	—
9.00	0.3543	107	188	1	1	—	0034248	—
9.00	0.3543	81	162	1	1	026090	—	0041284
9.50	0.3740	107	188	1	1	—	0034279	—
9.50	0.3740	81	162	1	1	026095	—	—
9.80	0.3858	116	197	1	1	—	0034293	—
10.00	0.3937	116	197	1	1	—	0033241	—
10.00	0.3937	87	168	1	1	026100	—	0040713
10.20	0.4016	116	197	1	1	—	0033265	—
10.20	0.4016	87	168	1	1	026102	—	0040720
10.50	0.4134	116	197	1	1	—	0033289	—
10.50	0.4134	87	168	1	1	026105	—	0040737
10.70	0.4213	125	206	1	1	—	0033296	—
11.00	0.4331	125	206	1	1	—	0033319	—



TAPER SHANK DRILL



d ₁ Øh ₈ mm	d ₁ decimal Inch	l ₂ mm	l ₁ mm	MTS	Pack Qty	5ATS	A350	A530
11.00	0.4331	94	175	1	1	026110	—	0040744
11.50	0.4528	125	206	1	1	—	0033333	—
11.50	0.4528	94	175	1	1	026115	—	0040751
11.75	0.4626	125	206	1	1	—	0033340	—
11.75	0.4626	94	175	1	1	—	—	0040768
11.80	0.4646	125	206	1	1	—	0033357	—
12.00	0.4724	134	215	1	1	—	0033364	—
12.00	0.4724	101	182	1	1	026120	—	0040775
12.20	0.4803	101	182	1	1	026122	—	—
12.50	0.4921	134	215	1	1	—	0033395	—
12.50	0.4921	101	182	1	1	026125	—	0040799
12.80	0.5039	101	182	1	1	026128	—	—
13.00	0.5118	134	215	1	1	—	0033401	—
13.00	0.5118	101	182	1	1	026130	—	0040812
13.50	0.5315	142	223	1	1	—	0033418	—
13.50	0.5315	108	189	1	1	026135	—	0040829
13.80	0.5433	108	189	1	1	026138	—	—
14.00	0.5512	142	223	1	1	—	0033432	—
14.00	0.5512	108	189	1	1	026140	—	0040836
14.25	0.5610	147	245	2	1	—	0033449	—
14.25	0.5610	114	212	2	1	026142	—	—
14.50	0.5709	147	245	2	1	—	0033456	—
14.50	0.5709	114	212	2	1	026145	—	0040850
14.75	0.5807	147	245	2	1	—	0033463	—
14.75	0.5807	114	212	2	1	026147	—	—
15.00	0.5906	147	245	2	1	—	0033470	—
15.00	0.5906	114	212	2	1	026150	—	0040874
15.25	0.6004	120	218	2	1	—	—	0040881
15.25	0.6004	153	251	2	1	—	0033487	—
15.50	0.6102	153	251	2	1	—	0033494	—
15.50	0.6102	120	218	2	1	026155	—	0040898
15.75	0.6201	153	251	2	1	—	0033500	—
15.75	0.6201	120	218	2	1	026157	—	—
16.00	0.6299	153	251	2	1	—	0033517	—
16.00	0.6299	120	218	2	1	026160	—	0040911
16.25	0.6398	159	257	2	1	—	0033524	—
16.50	0.6496	159	257	2	1	—	0033531	—
16.50	0.6496	125	223	2	1	026165	—	0040935
16.75	0.6594	159	257	2	1	—	0033548	—
17.00	0.6693	159	257	2	1	—	0033555	—
17.00	0.6693	125	223	2	1	026170	—	0040942
17.25	0.6791	165	263	2	1	—	0033562	—
17.50	0.6890	165	263	2	1	—	0033579	—
17.50	0.6890	130	228	2	1	026175	—	0040966
18.00	0.7087	165	263	2	1	—	0033593	—
18.00	0.7087	130	228	2	1	026180	—	0040980
18.50	0.7283	171	269	2	1	—	0033616	—
18.50	0.7283	135	233	2	1	026185	—	0040997
19.00	0.7480	171	269	2	1	—	0033623	—
19.00	0.7480	135	233	2	1	026190	—	0041017
19.50	0.7677	177	275	2	1	—	0033647	—
19.50	0.7677	140	238	2	1	026195	—	0041024
19.75	0.7776	177	275	2	1	—	0033654	—
20.00	0.7874	177	275	2	1	—	0033661	—
20.00	0.7874	140	238	2	1	026200	—	0041048
20.25	0.7972	184	282	2	1	—	0033678	—
20.50	0.8071	184	282	2	1	—	0033685	—
20.50	0.8071	145	243	2	1	026205	—	0041055
21.00	0.8268	184	282	2	1	—	0033692	—
21.00	0.8268	145	243	2	1	026210	—	0041062
21.50	0.8465	191	289	2	1	—	0033708	—
21.50	0.8465	150	248	2	1	026215	—	0041079
22.00	0.8661	191	289	2	1	—	0033715	—
22.00	0.8661	150	248	2	1	026220	—	0041086
22.50	0.8858	198	296	2	1	—	0033722	—
22.50	0.8858	155	253	2	1	026225	—	0041093



TAPER SHANK DRILL



d ₁ Øh ₈ mm	d ₁ decimal Inch	l ₂ mm	l ₁ mm	MTS	Pack Qty	5ATS	A350	A530
23.00	0.9055	198	296	2	1	—	0033739	—
23.00	0.9055	155	253	2	1	026230	—	0041109
23.50	0.9252	198	319	3	1	—	0033746	—
23.50	0.9252	155	276	3	1	026235	—	0041116
24.00	0.9449	206	327	3	1	—	0033753	—
24.00	0.9449	160	281	3	1	026240	—	0041123
24.50	0.9646	206	327	3	1	—	0033760	—
24.50	0.9646	160	281	3	1	026245	—	0041130
25.00	0.9843	206	327	3	1	—	0033777	—
25.00	0.9843	160	281	3	1	026250	—	0041147
25.50	1.0039	165	286	3	1	—	—	0041154
25.50	1.0039	214	335	3	1	—	0033784	—
26.00	1.0236	214	335	3	1	—	0033791	—
26.00	1.0236	165	286	3	1	026260	—	0041161
26.50	1.0433	214	335	3	1	—	0033807	—
26.50	1.0433	165	286	3	1	026265	—	0041178
27.00	1.0630	222	343	3	1	—	0033814	—
27.00	1.0630	170	291	3	1	026270	—	0041185
27.50	1.0827	170	291	3	1	—	—	0041192
27.50	1.0827	222	343	3	1	—	0033821	—
28.00	1.1024	222	343	3	1	—	0033838	—
28.00	1.1024	170	291	3	1	026280	—	0041208
28.50	1.1220	175	296	3	1	—	—	0041215
29.00	1.1417	230	351	3	1	—	0033845	—
29.00	1.1417	175	296	3	1	026290	—	0041222
29.50	1.1614	175	296	3	1	—	—	0041239
30.00	1.1811	230	351	3	1	—	0033852	—
30.00	1.1811	175	296	3	1	026300	—	0041246
30.50	1.2008	239	360	3	1	—	0033869	—
31.00	1.2205	239	360	3	1	—	0033876	—
31.00	1.2205	180	301	3	1	026310	—	0041253
31.50	1.2402	239	360	3	1	—	0033883	—
32.00	1.2598	248	397	4	1	—	0033890	—
32.00	1.2598	185	334	4	1	026320	—	0041260
33.00	1.2992	185	334	4	1	—	—	0148433
33.00	1.2992	248	397	4	1	—	0033906	—
34.00	1.3386	257	406	4	1	—	0033913	—
34.00	1.3386	190	339	4	1	026340	—	—
35.00	1.3780	257	406	4	1	—	0033920	—
35.00	1.3780	190	339	4	1	026350	—	0148457
36.00	1.4173	267	416	4	1	—	0033937	—
36.00	1.4173	195	344	4	1	026360	—	—
37.00	1.4567	267	416	4	1	—	0033944	—
37.00	1.4567	195	344	4	1	026370	—	—
38.00	1.4961	277	426	4	1	—	0033951	—
38.00	1.4961	200	349	4	1	026380	—	—
39.00	1.5354	277	426	4	1	—	0033968	—
40.00	1.5748	277	426	4	1	—	0033975	—
40.00	1.5748	200	349	4	1	026400	—	0148471
41.00	1.6142	287	436	4	1	—	0033982	—
42.00	1.6535	287	436	4	1	—	0033999	—
42.00	1.6535	205	354	4	1	026420	—	—
43.00	1.6929	298	447	4	1	—	0034002	—
44.00	1.7323	298	447	4	1	—	0034019	—
44.00	1.7323	210	359	4	1	026440	—	—
45.00	1.7717	298	447	4	1	—	0034026	—
46.00	1.8110	310	459	4	1	—	0034033	—
47.00	1.8504	310	459	4	1	—	0034040	—
48.00	1.8898	321	470	4	1	—	0034057	—
50.00	1.9685	321	470	4	1	—	0034101	—
50.00	1.9685	220	369	4	1	026500	—	—