



## PRODUCT DATA SHEET

Driller Red Grease Extreme Pressure Lithium Complex  
Grease, 14 Wt Oz  
Part Number: SL3640

### Product Description

Driller Red Grease is a NLGI #2 Red Grease which offer superior protection to lubricate a wide variety of severe duty drilling, industrial, mining and construction equipment. Timken load of 80 lbs.

### Applications

Drilling and Mining applications, backing plates, ball joints, chassis points, construction ball & roller bearings, idler bearings, industrial applications, pillow block bearings, sprocket bearings, U-joints, water pumps, wheel bearings

### Unit Package Description

14 Ounce Cartridge

### Brand

CRC

### Generic Description 1

Extreme Pressure Lithium Complex Grease

### Net Fill

14 Wt Oz

### UPC Code

072213364002

### Unit Dimensions

9.31H x 2.13W x 2.13D in

### Units Per Case

10

### Case Dimensions

9.5H x 4.5W x 11.38D in

### Cases Per Pallet

150

### Case Weight

10 lbs

### I 2 of 5 Code

30072213364003

### Appearance

Red, Smooth, Tacky

### Base Type

Lithium Complex

### Flash point (F)

302°F

### Flash point (C)

150°C

### Flammability Class - CPSC

None

### Spec Gravity Concentrate

0.93

### NLGI Grade

2

### Timken OK Load Lbs.


80 Lbs

### Plastic Safe

Yes

### Dielectric Strength

Not Determined

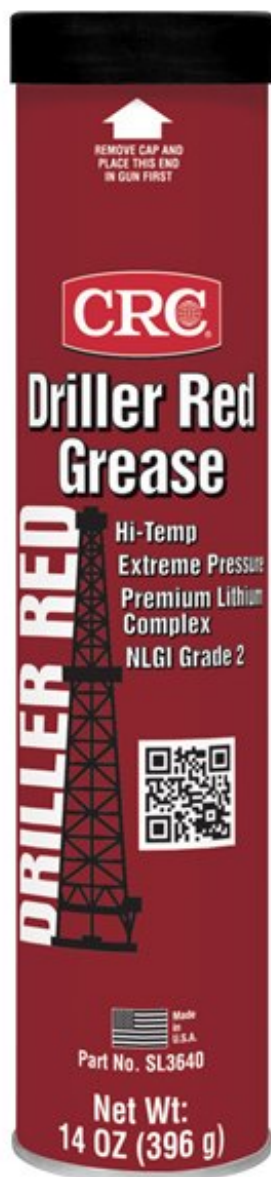

Last revised: 3/20/2017  
Page 1 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
[www.crcindustries.com](http://www.crcindustries.com)


CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



## PRODUCT DATA SHEET

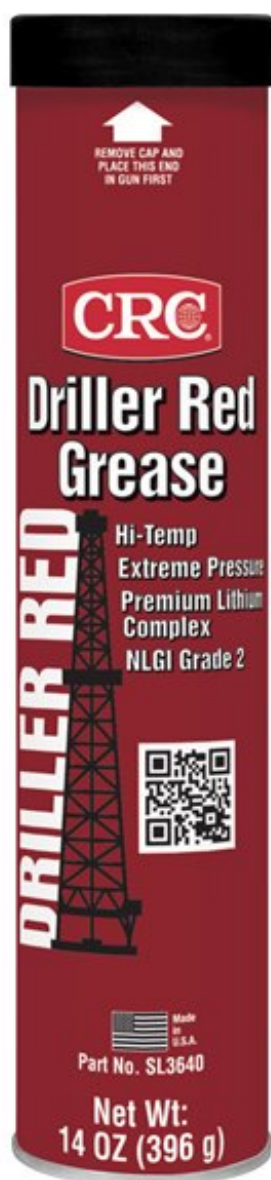

Working Temp (F)	-10 to 400°F
Working Temp (C)	-23 to 204°C
4 Ball EP	315 Kgf
4 Ball Wear	0.45
Drop Point	550°F
Leakage	2.0
Low Temp Torque	Not Determined
Oil Separation	1.0
Oxidation Stability	Not Determined
Pour Point (F)	Not Determined
Pour Point (C)	Not Determined
Water Washout	2.5 at 175°F
Worked Penetration	265 to 295
Propellant	None
DOT Proper Shipping Name	Not Regulated
VOC % (Federal)	Not Determined
VOC g/L (Federal)	Not Determined
VOC Lbs./Gal. (Federal)	Not Determined
VOC Category	Not Regulated
Removal (How To)	Remove with a degreaser.

Last revised: 3/20/2017  
Page 2 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
[www.crcindustries.com](http://www.crcindustries.com)

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.