

Industrial Workstation Floor Fans

37



Features

- Rotary switch
- Head tilts 360°
- Coated steel guards
- SJT type 3 conductor, 10' long cord
- Steel hub/spider aluminum paddle blades
- Meets OSHA standards
- 1 Year limited warranty


Motor Specifications

- Sleeve bearing
- Totally enclosed
- 1-Phase, 120V
- 3-Speed
- Permanently lubricated
- Frame size: 42
- 5/16" Shaft

Standard Models

SIZE	UPC# 686334	MODEL	FAN TYPE	MOTOR HP	CFM / RPM			DIMENSIONS			MAX AMPS	SHIPPING WT. (LBS)	LIST
					HIGH	MED	LOW	"H"	"W"	"D"			
12"	798617	F-12-TE	FLOOR MODEL	1/12	1650 / 1590	1420 / 1380	1120 / 1080	15-1/4"	14-1/2"	9-1/2"	1.1	13	138
18"	797290	F-18-TE		1/8	4600 / 1660	4200 / 1550	3200 / 1370	20-1/2"	20-1/2"	10-1/2"	1.5	20	173
24"	852852	F-24-TE		1/8	5850 / 1634	5200 / 1484	3600 / 1200	26"	26"	10-1/2"	2.4	23	322
18"	797306	F-18H-TE	HIGH STAND	1/8	4600 / 1660	4200 / 1550	3200 / 1370	53"	25"	27"	2.2	27	253
24"	854061	F-24H-TE		1/8	5850 / 1634	5200 / 1484	3600 / 1200	53"	30"	27"	2.4	30	423

TPI Commercial Workstation & Floor Fans

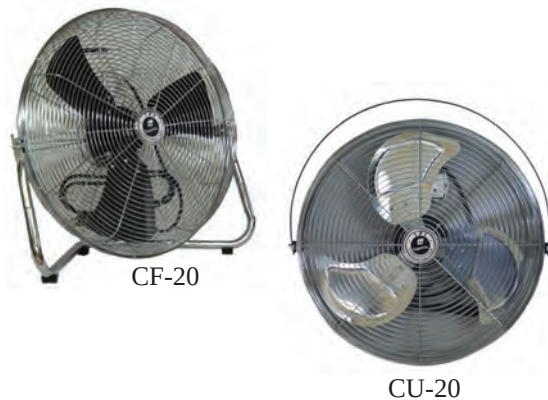

Features

- Rotary switch
- SJT type cord - 3 conductor - 7' long
- Aluminum blade
- Coated steel guards with retaining clips
- Meets OSHA standards
- 1 Year limited warranty



Motor Specification

- 3-Speed
- 120V
- Sleeve bearing
- 1-Phase
- Open ventilated
- Permanently lubricated

Standard Models

UPC# 686334	MODEL	SIZE	TYPE	MOTOR HP	CFM			MAX AMPS	WT. (LBS.)	LIST
					HIGH	MED	LOW			
872300	CF-12	12"	FLOOR	1/12	2100	1750	1500	0.6	10	80
872317	CF-18	18"	FLOOR	1/5	3150	2700	2550	1.4	16	100
870658	CF-20	20"	FLOOR	1/5	3450	3100	2950	1.9	18	138
523332	CU-20	20"	WORKSTATION	1/5	3450	3100	2950	1.9	18	166

Units should be used in clean, dry, commercial applications.

Note: Photograph is a representation of stocked models. Actual model may vary in appearance.