

Flap wheels

Flap wheels, drums

Flap wheels for angle grinders



Ideal for use on angle grinders in assembly shop operations.

Abrasive: Aluminum oxide A

Recommendation for use


Flap wheels for angle grinders perform best at the recommended cutting speed of 7,800 - 9,800 SFPM.

PFERD specification number


FR-WS

PFERDERGONOMICS®



Diameter (D) x width [Inches]	Thread	Grit and EDP number				Recom. speed RPM	Max. speed RPM	
		40	60	80	120			
4-1/2 x 3/4	5/8-11	45751	45753	45754	45755	7,500	13,300	2
5 x 3/4	5/8-11	45761	45763	45764	45765	6,850	12,200	2

Flap drums

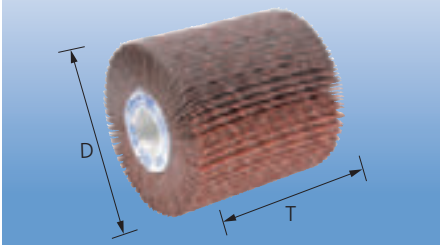

Flap drums with aluminum oxide coated materials can be universally used on all materials.

Application examples

- Fine grinding work on large radii in container, kitchen and apparatus construction.
- Removal of rough unevenness e.g. weld grinding.
- Achieving homogeneous grinding patterns on large surfaces and contours with hand-guided applications (patterns).
- Finest grinding as a preliminary stage to polishing.

Abrasive: Aluminum oxide A

Recommendation for use

Flap drums produce the best results at the recommended peripheral speed of 3,000 - 6,000 SFPM.

Ordering note


For non-woven drums, please refer to page 86 and 87 in this catalogue. Refer to our "Power tools" catalogue (section 209) for information on linear finishing tool, EDP 91217.

PFERD specification number

FR-W

PFERDERGONOMICS®



Diameter (D) x width (T) [Inches]	Bore [Inches]	Grit and EDP number						Recom. speed RPM	Max. speed RPM	
		40	60	80	120	150	180			
4 x 4	3/4	45780	45781	45782	45783	45784	45785	3,800	6,100	1

