


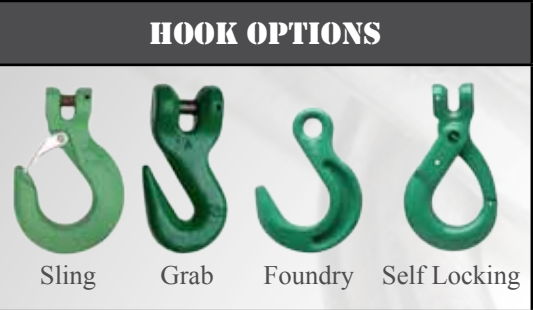


DILLON SUPPLY CO.

CHAIN SLING GUIDE

Triple & Quadruple Leg Slings												
Chain Size	Working Load Limit			Type TOS	Type TOG	Type TOF	Type TOSL	Type QOS	Type QOG	Type QOF	Type QOSL	Each Extra Ft
	60°	45°	30°									
9/32"	11,200 lbs	9,100 lbs	6,400 lbs	(03000115) \$ 337.25	(03000116) \$ 299.34	(03000117) \$ 461.88	(03000118) \$ 506.65	(03000131) \$ 416.75	(03000132) \$ 366.21	(03000133) \$ 582.93	(03000134) \$ 642.62	\$ 13.88
3/8"	22,900 lbs	18,700 lbs	13,200 lbs	(03000119) \$ 421.15	(03000120) \$ 355.64	(03000121) \$ 587.74	(03000122) \$ 634.39	(03000135) \$ 520.09	(03000136) \$ 432.76	(03000137) \$ 742.21	(03000138) \$ 804.42	\$ 17.12
1/2"	39,000 lbs	31,800 lbs	22,500 lbs	(03000123) \$ 626.06	(03000124) \$ 545.44	(03000125) \$ 786.92	(03000126) \$ 885.69	(03000139) \$ 779.29	(03000140) \$ 671.80	(03000141) \$ 993.78	(03000142) \$ 1,125.47	\$ 29.68
5/8"	58,700 lbs	47,900 lbs	33,900 lbs	(03000127) \$ 915.46	(03000128) \$ 775.33	-	-	(03000143) \$ 1,127.63	(03000144) \$ 940.79	-	-	\$ 40.52
3/4"	91,700 lbs	74,900 lbs	53,000 lbs	(03000129) \$ 1,650.82	(03000130) \$ 1,462.90	-	-	(03000145) \$ 1,970.80	(03000146) \$ 1,720.24	-	-	\$ 75.36

*All pricing shown above is for 5' slings. Anything less than 5' will use 5' pricing.
*Safety Note: A quadruple leg sling typically will not sustain loads with even distribution to the four legs, especially when loads are of rigid structure. Therefore, maximum working load limits are the same as with triple leg designs of equal quality, size and angle.

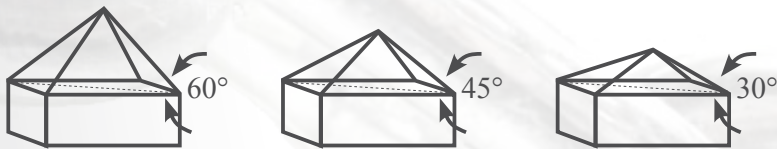

WARNING: DO NOT EXCEED WORKING LOAD LIMIT
Use only Alloy Chain with Compatible Components for Overhead Lifting

- QUALITY GRADE 100 CAM-ALLOY MATERIAL (MADE IN THE USA): 25% HIGHER WORKING LOAD LIMIT VS. GRADE 80 PRODUCT MEANS LIGHTER SLINGS WITH THE SAME CAPACITY & AFFORDABILITY
- CERTIFICATE OF COMPLIANCE FOR EACH SLING
- QUICK TURNAROUND TIME ON SLING ORDERS

- North Carolina**
Charlotte 704.332.6151
Durham 919.383.8584
Elizabeth City 252.335.0861
Goldsboro 919.735.2421
Greensboro 336.547.6295
Greenville 252.758.7757
Laurinburg 910.844.5211
Raleigh 919.838.4200
Rocky Mount 252.442.2161
Wilmington 910.254.1400
Winston Salem 336.723.2961
- South Carolina**
Charleston 843.722.8851
Columbia 803.779.0640
Conway 843.234.4277
Greenwood 864.223.4391
Greer 864.213.9000
Orangeburg 803.534.9850

Virginia
Franklin 757.562.4721
Harrisonburg 540.434.0778
Norfolk 757.855.2041
- Georgia**
Augusta 706.823.6444
Valdosta 229.333.0096

Indiana
Batesville 812.932.1331

Kentucky
Lexington 859.231.8104

Tennessee
Nashville 615.641.7700




From Overhead Beams to Hoists to Below the Hook Devices, choose Dillon Supply Co. as your custom provider for all your lifting needs.





SYMBOL 1: CHOOSE THE BASIC TYPE

- (S) Single Chain Sling
- (C) Single Choker Chain Sling
- standard end length on each end, no hooks
- (D) Double Branch Chain Sling (2 Legs)
- (T) Triple Branch Chain Sling (3 Legs)
- (Q) Quadruple Branch Chain Sling (4 Legs)

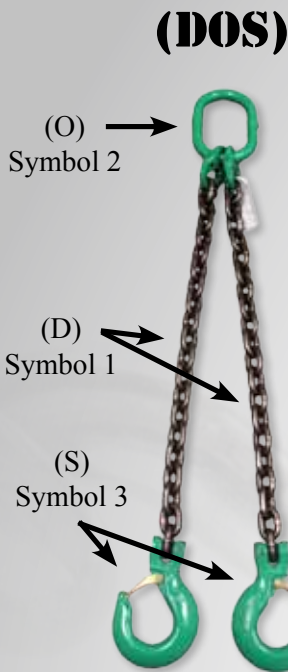


SYMBOL 2: CHOOSE THE TYPE OF MASTER/END LINK

- (O) Oblong Master Link of Standard Dimensions

SYMBOL 3: CHOOSE THE TYPE OF HOOK

- (S) Sling Hook
- (G) Grab Hook
- (F) Foundry Hook
- (SL) Self Locking

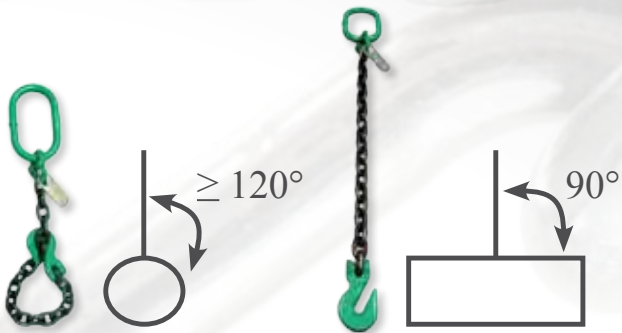

HOW TO SELECT THE RIGHT CHAIN SLING



Step 1: Determine the weight and configuration of the load(s) to be lifted.

Step 2: Determine the type of chain sling required, according to the weight and configuration.

Step 3: Determine the size of the body chain based on the working load limits, (take into consideration the required angle).

Single Leg Slings										
Chain Size	Working Load Limit	Working Load Limit	Type SOS	Type SOG	Type SOF	Type SOSL	Type SGS	Type SGG	Type SSS	Each Extra Foot
	SL Choker	90°								
9/32"	3,500 lbs	4,300 lbs	(03093400) \$ 124.31	(03093405) \$ 111.67	(03000080) \$ 166.07	(03000081) \$ 180.99	(03000082) \$ 111.65	(03000083) \$ 99.02	(03000084) \$ 124.29	\$ 3.47
3/8"	7,100 lbs	8,800 lbs	(03093410) \$ 150.59	(03093415) \$ 128.75	(03000085) \$ 206.33	(03000086) \$ 221.88	(03000087) \$ 132.24	(03000088) \$ 110.41	(03000089) \$ 154.08	\$ 4.28
1/2"	12,000 lbs	15,000 lbs	(03093420) \$ 221.60	(03093425) \$ 194.72	(03000090) \$ 275.44	(03000091) \$ 308.36	(03000092) \$ 196.00	(03000093) \$ 169.13	(03000094) \$ 222.88	\$ 7.42
5/8"	18,100 lbs	22,600 lbs	(03000095) \$ 309.94	(03000096) \$ 263.23	-	-	(03000097) \$ 262.04	(03000098) \$ 215.33	(03000099) \$ 308.75	\$ 10.13
3/4"	28,300 lbs	35,300 lbs	(03000100) \$ 469.76	(03000101) \$ 407.12	-	-	(03000102) \$ 376.72	(03000103) \$ 314.08	(03000104) \$ 439.36	\$ 18.84

*All pricing shown above is for 5' slings. Anything less than 5' will use 5' pricing.

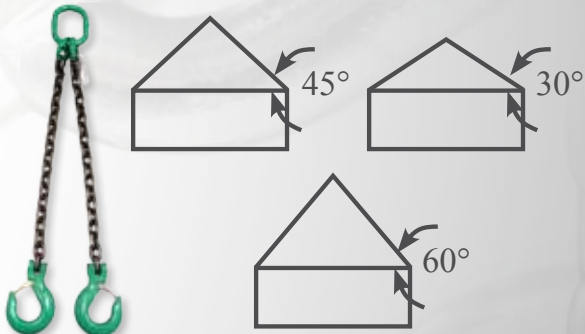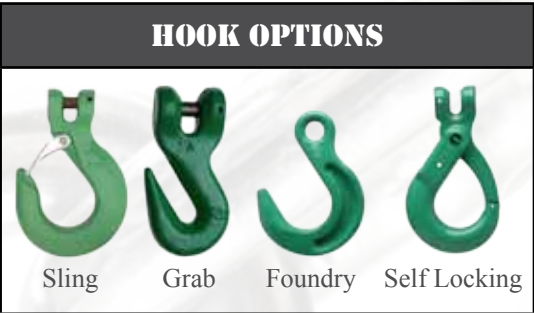

Working Load Limit								
Chain Size	Single Leg Choker	Single	Double			Triple & Quadruple		
		90°	60°	45°	30°	60°	45°	30°
in.	lbs.	lbs.	lbs.	lbs.	lbs.	lbs.	lbs.	lbs.
9/32	3,500	4,300	7,400	6,100	4,300	11,200	9,100	6,400
3/8	7,100	8,800	15,200	12,400	8,800	22,900	18,700	13,200
1/2	12,000	15,000	26,000	21,200	15,000	39,000	31,800	22,500
5/8	18,100	22,600	39,100	32,000	22,600	58,700	47,900	33,900
3/4	28,300	35,300	61,600	49,900	35,300	91,700	74,900	53,000

*When determining length of sling legs, a good estimate is to cut chain the same length as the load(s) being lifted, creating an optimal 60° equilateral triangle.

Double Leg Slings								
Chain Size	Working Load Limit			Type DOS	Type DOG	Type DOF	Type DOSL	Each Extra Foot
	60°	45°	30°					
9/32"	7,400 lbs	6,100 lbs	4,300 lbs	(03093430) \$ 202.16	(03093435) \$ 176.88	(03000105) \$ 285.46	(03000106) \$ 315.30	\$ 6.94
3/8"	15,200 lbs	12,400 lbs	8,800 lbs	(03093440) \$ 247.88	(03093445) \$ 204.21	(03000107) \$ 359.15	(03000108) \$ 390.25	\$ 8.56
1/2"	26,000 lbs	21,200 lbs	15,000 lbs	(03093450) \$ 373.17	(03093455) \$ 319.43	(03000109) \$ 480.64	(03000110) \$ 546.48	\$ 14.84
5/8"	39,100 lbs	32,000 lbs	22,600 lbs	(03000111) \$ 520.45	(03000112) \$ 427.03	-	-	\$ 20.26
3/4"	61,100 lbs	49,900 lbs	35,300 lbs	(03000113) \$ 788.09	(03000114) \$ 662.81	-	-	\$ 37.68

*All pricing shown above is for 5' slings. Anything less than 5' will use 5' pricing.