

Feed Rate Chart

Alpha Code	Feed in Inches per Revolution (IPR) ± 25%															Ø Diameter				
	1mm/ 1/32"	2mm/ 3/32"	3mm/ 1/8"	4mm/ 5/32"	5mm/ 3/16"	6mm/ 1/4"	8mm/ 5/16"	10mm/ 3/8"	12mm/ 1/2"	15mm/ 9/16"	16mm/ 5/8"	20mm/ 3/4"	25mm/ 1"	30mm/ 1.1/8"	40mm/ 1.5/8"	50mm/ 2"				
A	0.0004	0.0009	0.0011	0.0013	0.0014	0.0017	0.0021	0.0024	0.0027	0.0032	0.0034	0.0043	0.0049	0.0053	0.0061	0.0069				
B	0.0006	0.0011	0.0015	0.0016	0.0018	0.0021	0.0026	0.0031	0.0035	0.0041	0.0043	0.0053	0.0060	0.0065	0.0074	0.0082				
C	0.0006	0.0013	0.0017	0.0020	0.0022	0.0025	0.0031	0.0039	0.0043	0.0049	0.0051	0.0063	0.0071	0.0077	0.0087	0.0094				
D	0.0006	0.0015	0.0021	0.0024	0.0027	0.0031	0.0039	0.0047	0.0051	0.0059	0.0061	0.0074	0.0083	0.0090	0.0100	0.0108				
E	0.0007	0.0017	0.0024	0.0028	0.0031	0.0037	0.0045	0.0055	0.0059	0.0068	0.0071	0.0085	0.0094	0.0102	0.0112	0.0122				
F	0.0007	0.0020	0.0029	0.0033	0.0037	0.0043	0.0054	0.0065	0.0070	0.0080	0.0083	0.0098	0.0108	0.0116	0.0126	0.0135				
G	0.0007	0.0022	0.0033	0.0038	0.0043	0.0050	0.0063	0.0075	0.0081	0.0091	0.0094	0.0110	0.0122	0.0130	0.0140	0.0148				
H	0.0008	0.0026	0.0040	0.0046	0.0051	0.0059	0.0075	0.0090	0.0096	0.0107	0.0110	0.0126	0.0140	0.0148	0.0157	0.0165				
I	0.0008	0.0030	0.0047	0.0053	0.0059	0.0068	0.0087	0.0104	0.0110	0.0122	0.0126	0.0142	0.0157	0.0165	0.0173	0.0181				
J	0.0009	0.0033	0.0053	0.0060	0.0067	0.0078	0.0098	0.0117	0.0124	0.0137	0.0142	0.0159	0.0175	0.0183	0.0191	0.0198				
K	0.0010	0.0036	0.0059	0.0067	0.0075	0.0087	0.0110	0.0130	0.0138	0.0153	0.0157	0.0177	0.0193	0.0201	0.0209	0.0215				
L	0.0011	0.0040	0.0065	0.0073	0.0082	0.0094	0.0120	0.0142	0.0152	0.0165	0.0169	0.0191	0.0207	0.0215	0.0224	0.0231				
M	0.0012	0.0043	0.0071	0.0080	0.0089	0.0102	0.0130	0.0154	0.0165	0.0177	0.0181	0.0205	0.0220	0.0228	0.0238	0.0248				
N	0.0013	0.0047	0.0077	0.0086	0.0095	0.0110	0.0140	0.0165	0.0179	0.0189	0.0193	0.0219	0.0234	0.0242	0.0253	0.0265				
S	0.0003	0.0006	0.0008	0.0010	0.0012	0.0015	0.0020	0.0031	0.0039	0.0048	0.0051	0.0059	0.0070	0.0070	0.0090					
T	0.0006	0.0011	0.0016	0.0020	0.0024	0.0028	0.0035	0.0043	0.0051	0.0063	0.0067	0.0075	0.0080	0.0090	0.0100					
U	0.0010	0.0019	0.0028	0.0031	0.0035	0.0042	0.0055	0.0067	0.0079	0.0088	0.0091	0.0094	0.0110	0.0120	0.0140					
V	0.0015	0.0027	0.0039	0.0045	0.0051	0.0060	0.0079	0.0098	0.0110	0.0122	0.0126	0.0134	0.0160	0.0170	0.0200					
W	0.0019	0.0035	0.0051	0.0059	0.0067	0.0079	0.0102	0.0130	0.0150	0.0165	0.0169	0.0177	0.0190	0.0190	0.0200					
X	0.0022	0.0041	0.0059	0.0071	0.0083	0.0098	0.0130	0.0165	0.0189	0.0210	0.0217	0.0228								
Y	0.0027	0.0049	0.0071	0.0087	0.0102	0.0125	0.0169	0.0217	0.0276	0.0276	0.0276	0.0291								
Z	0.0037	0.0068	0.0098	0.0128	0.0157	0.0210	0.0315	0.0394	0.0433	0.0463	0.0472	0.0472								

How To Use This Chart to Find Cutting Feed Rate (IPR):

1. Find your Alpha Code on the AMG Chart (example: 279 U : U is the Alpha Code)
2. Find the closest diameter for your cutting application on the chart to find your IPR


Application Material Groups (AMG)		Hardness HRC	ISO
1. Steel	1.1 Magnetic soft steel	12L14, 12L15	<120 HB P 1
	1.2 Structural Steel/ case carburising steel	1005-1025, 1214, 1215, A36	<200 HB P 1
	1.3 Plain Carbon steel	1030-1060, 1050-1060, 1144-1146	<24 P 2
	1.4 Alloy steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	<24 P 3
	1.5 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>24<38 P 4
	1.6 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>38 H 1
	1.7 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	49-55 H 3
	1.8 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	55-63 H 4
2. Stainless Steel	2.1 Free machining Stainless Steel	200, 303, 416, 420F, 430F, 440	<24 M 1
	2.2 Austenitic	301, 302, 304, 316, 321, 330, CUSTOM 455, AM-350	<24 M 3
	2.3 Ferritic + Austenitic, Martensitic	318-329, 400-446, DUPLEX	<32 M 2
	2.4 Precipitation Hardened	15-5PH, Custom 450 17-4PH	<32 S 2
3. Cast Iron	3.1 Lamellar graphite	Grey, G10, Gg40, J431C, A48 CLASS 20	<150 HB K 1
	3.2 Lamellar graphite	Grey, GG25-Gg40, J158, A48 CLASS 40-60	>150 HB<32 K 2
	3.3 Nodular graphite/ Malleable Cast Iron	A220, A436, A439, A602, Black, GGG40-GGG70	<200 HB K 3
	3.4 Nodular graphite/ Malleable Cast Iron	Black Gts/Gtw, J434C	>200 HB<32 K 4
4. Titanium	4.1 Titanium, unalloyed	Commercially Pure	<200 HB S 1
	4.2 Titanium, alloyed	6Al4V, 6A14V-2Sn, Monel, Monel K	<28 S 2
	4.3 Titanium, alloyed	6Al4V-4Mo, 7A14V-4Mo, 4911-4967	>28<38 S 3
5. Nickel	5.1 Nickel, unalloyed	Commercially Pure, 17644, 200, 5553	<150 HB S 1
	5.2 Nickel, alloyed	Monel 400, Hastelloy C, Inconel 625, Waspaloy	<28 S 2
	5.3 Nickel, alloyed	Inconel 718, Nimonic 75-95, Rene 41, Inconel 825, A286	>28<38 S 3
6. Copper	6.1 Copper	Commercially Pure	<100 HB N 3
	6.2 β-Brass, Bronze	314-340, 350-370	<200 HB N 4
	6.3 α-Brass	Alloyed Cu + Al + Fe, Long Chipping	<200 HB N 3
	6.4 High Strength Bronze	Ampco 18-25	<49 N 4
7. Aluminium Magnesium	7.1 Al, Mg, unalloyed	Commercially Pure	<100 HB N 1
	7.2 Al alloyed, Si<0.5%	6061 T6, 7075, 314-340	<150 HB N 1
	7.3 Al alloyed, Si>0.5%<10%	6061 T6, 380-390	<120 HB N 1
	7.4 Al alloyed, Si>10% Mg alloys	Magnesium Whisker Reinforced	<120 HB N 2
8. Synthetic Materials	8.1 Thermoplastics	Ultradid, Polystrol	---
	8.2 Thermosetting plastics	Bakelit, Pertinax	---
	8.3 Reinforced plastic materials	CFK, GFKAFK	---
9. Hard Mat.	9.1 Cermets (Metal-ceramics)	Ferrotic	<54 H
10. Graphite	10.1 Standard graphite	---	O

SPECIAL PURPOSE DRILL



Jobber Length Carbide Tipped

D444 Heavy-Duty Brazed Carbide Tipped for abrasive materials or non-ferrous materials.

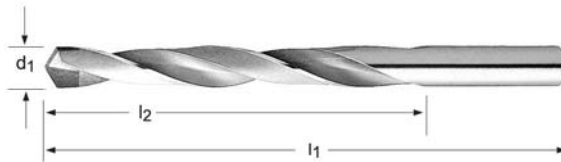

D444



4XD

HSS
HM



N32 - 1/2

d_1 Ø "/Nr./letter	d_1 decimal Inch	l_2 Inch	l_1 Inch	Pack Qty	D444
32	0.1160	1.5/8	2.3/4	1	034632
1/8	0.1250	1.5/8	2.3/4	1	034408
30	0.1285	1.5/8	2.3/4	1	034630
29	0.1360	1.3/4	2.7/8	1	034629
9/64	0.1406	1.3/4	2.7/8	1	034409
25	0.1495	1.7/8	3"	1	034625
5/32	0.1563	2"	3.1/8	1	034410
21	0.1590	2.1/8	3.1/4	1	034621
20	0.1610	2.1/8	3.1/4	1	034620
19	0.1660	2.1/8	3.1/4	1	034619
18	0.1695	2.1/8	3.1/4	1	034618
11/64	0.1719	2.1/8	3.1/4	1	034411
17	0.1730	2.3/16	3.3/8	1	034617
15	0.1800	2.3/16	3.3/8	1	034615
14	0.1820	2.3/16	3.3/8	1	034614
13	0.1850	2.5/16	3.1/2	1	034613
3/16	0.1875	2.5/16	3.1/2	1	034412
11	0.1910	2.5/16	3.1/2	1	034611
10	0.1935	2.7/16	3.5/8	1	034610
9	0.1960	2.7/16	3.5/8	1	034609
7	0.2010	2.7/16	3.5/8	1	034607
13/64	0.2031	2.7/16	3.5/8	1	034413
3	0.2130	2.1/2	3.3/4	1	034603
7/32	0.2188	2.1/2	3.3/4	1	034414
1	0.2280	2.5/8	3.7/8	1	034601
15/64	0.2344	2.5/8	3.7/8	1	034415
B	0.2380	2.3/4	4"	1	034502
C	0.2420	2.3/4	4"	1	034503
E	0.2500	2.3/4	4"	1	034505
1/4	0.2500	2.3/4	4"	1	034416
F	0.2570	2.7/8	4.1/8	1	034506
G	0.2610	2.7/8	4.1/8	1	034507
17/64	0.2656	2.7/8	4.1/8	1	034417



SPECIAL PURPOSE DRILL

d_1 Ø "/Nr./letter	d_1 decimal Inch	l_2 Inch	l_1 Inch	Pack Qty	D444
H	0.2660	2.7/8	4.1/8	1	034508
I	0.2720	2.7/8	4.1/8	1	034509
J	0.2770	2.7/8	4.1/8	1	034510
K	0.2810	2.15/16	4.1/4	1	034511
9/32	0.2813	2.15/16	4.1/4	1	034418
L	0.2900	2.15/16	4.1/4	1	034512
19/64	0.2969	3.1/16	4.3/8	1	034419
N	0.3020	3.1/16	4.3/8	1	034514
5/16	0.3125	3.3/16	4.1/2	1	034420
O	0.3160	3.3/16	4.1/2	1	034515
P	0.3230	3.5/16	4.5/8	1	034516
21/64	0.3281	3.5/16	4.5/8	1	034421
Q	0.3320	3.7/16	4.3/4	1	034517
R	0.3390	3.7/16	4.3/4	1	034518
11/32	0.3437	3.7/16	4.3/4	1	034422
S	0.3480	3.1/2	4.7/8	1	034519
T	0.3580	3.1/2	4.7/8	1	034520
23/64	0.3594	3.1/2	4.7/8	1	034423
U	0.3680	3.5/8	5"	1	034521
3/8	0.3750	3.5/8	5"	1	034424
25/64	0.3906	3.3/4	5.1/8	1	034425
13/32	0.4063	3.7/8	5.1/4	1	034426
Z	0.4130	3.7/8	5.1/4	1	034526
27/64	0.4219	3.15/16	5.3/8	1	034427
7/16	0.4375	4.1/16	5.1/2	1	034428
29/64	0.4531	4.3/16	5.5/8	1	034429
15/32	0.4687	4.5/16	5.3/4	1	034430
31/64	0.4844	4.3/8	5.7/8	1	034431
1/2	0.5000	4.1/2	6"	1	034432